

Egaflex

The Egaflex PVCu conduit range is a corrugated pliable system which can be used for the connection of vibrating equipment or to provide tight bends for interconnecting conduits. The range can be surface mounted or cast-in concrete and can also be used with standard conduit fittings.

Manufactured in accordance with:


BS EN 61386-1
BS EN 61386-22

Material: PVCu

Colour: White

Standard length: 50 metres coil

Corrugated PVCu Conduit

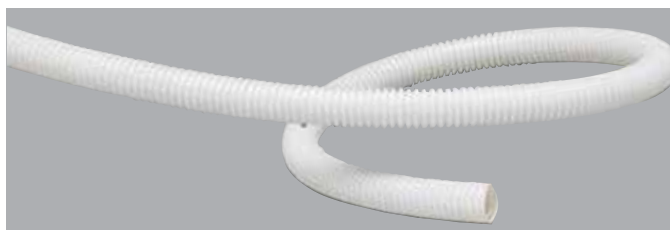

16mm	EF1WHI	50m Coil	FAB1WHI	50
20mm	EF2WHI	50m Coil	FAB2WHI	50
25mm	EF3WHI	50m Coil	FAB3WHI	50

Rectangular Channelling

2 METRE LENGTHS

Wall thickness: 0.9mm

Material: PVCu

Colour: White

Standard length: 2 metres

Other lengths can be supplied against quantity orders.

All extrusions manufactured from 100% recycled material.*

* Based on 2014 consumption.



12mm	(8mm DEPTH APPROX)	REC1WHI	150mm
25mm	(8mm DEPTH APPROX)	REC2WHI	150mm
25mm	(9.5mm DEPTH APPROX)	REC3WHI	150mm